



合漢企業股份有限公司 HAO HANN ENTERPRISE CO., LTD.
和漢機械股份有限公司 HER HANN MACHINERY CO., LTD.

OFFICE:

FACTORY:

臺北市長春路40號9樓之5

台北縣三芝鄉古庄村四機橋53-1號

ROOM 9-5, 9FL., NO. 40, CHANG-CHUNO.53-1, SHY JANN CHYAU,

TAIPEI, TAIWAN, R. O. C.

KU JUANG TSUEN, SAN CHIH HSIANG,


TEL: (02) 25651493~5, 25315128 (REP. TAIPEI HSIEN, TAIWAN, R.O.C.)

FAX: (886-2)25315129, 25676587

TEL: (886-2) 2636-0717; 2636-0718 (REP.)

E-mail address: haohann@ms7.hinet.net FAX: (886-2) 2636-5979

DOME HEAD-The regular heas is used for most industrial applications.

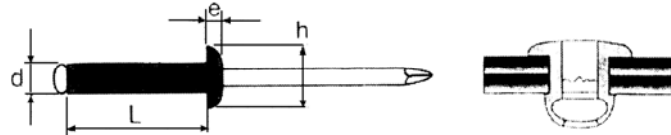

RIVET Ø Niet Rivet		DRILL Ø Bohrloch Perceage	NOM. RIVET LENGTH L	GRIP RANGE Klemmlange Epaisseur a rivet	RIVET CODE Bestell Nr. Reference	NOM. HEAD DIA h	NOM. HEAD HEIGHT e	TYPICAL SHEAR STRENGTH Scherfestigkeit Res. Cisaillement	TYPICAL TENSILE STRENGTH Zugfestigkeit Res. Arrachement
mm inch	mm inch	mm	mm			mm inch	mm inch	kgf Lbs	kgf Lbs
2.9 0.114	#31	4.5	0.3 - 1.5	A29045D	6.3 0.248	0.9 0.035	70 154	85 187	
		6.0	0.5 - 3.0	A29060D					
		8.0	3.0 - 5.0	A29080D					
		10.0	5.0 - 7.0	A29100D					
		12.0	7.0 - 9.0	A29120D					
		14.0	9.0 - 11.0	A29140D					
		16.0	11.0 - 13.0	A29160D					
		18.0	13.0 - 15.0	A29180D					
		20.0	15.0 - 17.0	A29200D					
3.2 (1/8) 0.125"	#30	4.5	0.3 - 1.0	A32045D	6.3 0.248	0.9 0.035	75 165	100 220	
		6.0	0.5 - 2.5	A32060D					
		8.0	2.5 - 4.5	A32080D					
		10.0	4.5 - 6.5	A32100D					
		12.0	6.5 - 8.5	A32120D					
		14.0	8.5 - 10.5	A32140D					
		16.0	10.5 - 12.5	A32160D					
		18.0	12.5 - 14.5	A32180D					
		20.0	14.5 - 16.5	A32200D					
22.0	16.5 - 18.5	A32220D							
3.8 (0.15")	0.157"	6.0	1.0 - 1.5	A38060D	7.8 0.307	1.2 0.047	90 198	140 309	
		8.0	1.5 - 3.5	A38080D					
		10.0	3.5 - 5.5	A38100D					
		12.0	5.5 - 7.5	A38120D					
		14.0	7.5 - 9.5	A38140D					
		16.0	9.5 - 11.5	A38160D					
		18.0	11.5 - 13.5	A38180D					
		20.0	13.5 - 15.5	A38200D					
		22.0	15.5 - 17.5	A38220D					
25.0	17.5 - 20.5	A38250D							
30.0	20.5 - 25.5	A38300D							
4.0 (5/32") 0.156	#20	6.0	1.0 - 1.5	A40060D	7.8 0.308	1.2 0.047	100 220	160 353	
		8.0	1.5 - 3.5	A40080D					
		10.0	3.5 - 5.5	A40100D					
		12.0	5.5 - 7.5	A40120D					
		14.0	7.5 - 9.5	A40140D					
		16.0	9.5 - 11.5	A40160D					
		18.0	11.5 - 13.5	A40180D					
		20.0	13.5 - 15.5	A40200D					
		22.0	15.5 - 17.5	A40220D					
25.0	17.5 - 20.5	A40250D							
30.0	20.5 - 25.5	A40300D							
4.8 (3/16") 0.187	#11	8.0	1.0 - 3.0	A48080D	9.3 0.366	1.3 0.051	150 331	220 485	
		10.0	3.0 - 5.0	A48100D					
		12.0	5.0 - 7.0	A48120D					
		14.0	7.0 - 9.0	A48140D					
		16.0	9.0 - 11.0	A48160D					
		18.0	11.0 - 13.0	A48180D					
		20.0	13.0 - 15.0	A48200D					
		22.0	15.0 - 17.0	A48220D					
		25.0	17.0 - 20.0	A48250D					
		27.0	20.0 - 22.0	A48270D					
		30.0	22.0 - 25.0	A48300D					
		33.0	25.0 - 28.0	A48330D					
		35.0	28.0 - 30.0	A48350D					
40.0	30.0 - 35.0	A48400D							