



合漢企業股份有限公司 HAO HANN ENTERPRISE CO., LTD.
和漢機械股份有限公司 HER HANN MACHINERY CO., LTD.


OFFICE:

臺北市長春路40號9樓之5
 ROOM 9-5, 9FL., NO. 40, CHANG-CHUN RD.,
 TAIPEI, TAIWAN, R. O. C.
 TEL: (02) 25651493~5, 25315128 (REP.)
 FAX: (886-2)25315129, 25676587
 E-mail address: haohann@ms7.hinet.net

FACTORY:

台北縣三芝鄉古庄村四棧橋53-1號
 NO.53-1, SHY JANN CHYAU,
 KU JUANG TSUEN, SAN CHIH HSIANG,
 TAIPEI HSIEN, TAIWAN, R.O.C.
 TEL: (886-2) 2636-0717; 2636-0718 (REP.)
 FAX: (886-2) 2636-5979

CCOUNTERSUNK HEAD is used to obtain a completely flush surface on the finished assembly.

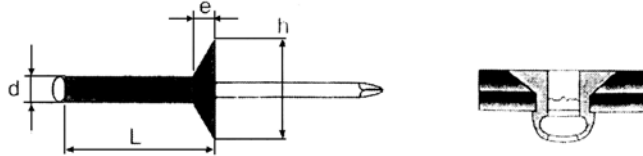

K

120 COTERSUNK HEAD
 Senkkopf
 Tete Fraisee

Ø		h		e ret.	
mm	inch	mm	inch	mm	inch
2.9	0.114	5.7	0.224	0.9	0.035
3.2	(1/8") 0.125	5.7	0.224	0.9	0.035
4.0	(5/32") 0.156	7.2	0.283	1.1	0.043
4.8	(3/16") 0.187	8.7	0.342	1.3	0.051

ANOTHER POSSIBILITIES AND TYPES FOR ALUMINIUM/STEEL RIVETS

Available in three diameters 3.2mm , 4.0mm and 4.8mm , with Dome Head , Countersunk 120 and Large Head.
 (Rivet lengths and grip range are the same as for Aluminium/Steel Type A Rivet)

B

ALUMINIUM/STEEL TYPE B RIVET
 ALUMINIUM RIVET BODY ALMG 3.5 - 5154
 WITH STEEL MANDREL

RIVET DIA		SHEAR STRENGTH		TENSILE STRENGTH	
Ø mm	Ø inch	kgf	Lbs	kgf	Lbs
3.2	(1/8") 0.125	80	176	110	243
4.0	(5/32") 0.156	140	309	180	397
4.8	(3/16") 0.187	190	419	295	650

C

ALUMINIUM/STEEL TYPE C RIVET
 ALUMINIUM RIVET BODY ALMG 5.0 - 5056
 WITH STEEL MANDREL

RIVET DIA		SHEAR STRENGTH		TENSILE STRENGTH	
Ø mm	Ø inch	kgf	Lbs	kgf	Lbs
3.2	(1/8") 0.125	100	220	145	320
4.0	(5/32") 0.156	160	353	200	441
4.8	(3/16") 0.187	220	485	330	723

ALUMINIUM RIVET Body / ALUMINIUM Mandrel

H

ALUMINIUM/STEEL TYPE H RIVET
 ALUMINIUM RIVET BODY ALMG 2.0 / ALMG 2.5 - 5251 / 5052
 WITH ALUMINIUM MANDREL

RIVET DIA		SHEAR STRENGTH		TENSILE STRENGTH	
Ø mm	Ø inch	kgf	Lbs	kgf	Lbs
3.2	(1/8") 0.125	65	143	104	229
4.0	(5/32") 0.156	105	231	150	331
4.8	(3/16") 0.187	145	320	235	518